

ASSEMBLING & INSTALLATION INSTRUCTIONS

The drawing shown may not exactly match the product enclosed. However, the installation instructions do apply to this product.

4083


- WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
- ATTENTION! COUPER LE COURANT AU FUSIBLE OU UN DISJONCTEUR.

ASSEMBLING THE FIXTURE (Fig.2)

- 1. Shut off the power at the circuit breaker and remove old fixture from ceiling, including the old single bar.
- 2. Carefully unpack new fixture and lay all the parts on a clear surface. Take care not to lose any small parts necessary for installation.
- **3.** Attach the mounting screw part way into the side hole of the crook cross bar, then lock it securely with the small hex nut until becoming. Attach the cross bar to the junction box using two box screws as shown. The side of the cross bar marked "GND" must face out. **The junction box is not included.**
- 4. While holding the lamp body(B) towards the ceiling, connect the electrical wires as Shown in **Fig.2**, making sure that all wire nuts are secured. You may have to wrap the connections with electrical tape. If your outlet has a ground wire (green or bare copper), connect the fixture ground wire to it. Otherwise connect fixture's ground wire directly to the Mounting strap with the green screw provided. After wires are connected, tuck them carefully inside the Junction Box.
- 5. Raise the lamp body(B) onto the junction box, aligning screws on crook cross bar with mounting holes in the plate and lock it securely with the ball nuts(A).
- 6. Install the light bulb(Not included) in accordance with the fixture specifications. NOTE: DO NOT EXCEED THE SPECIFIED WATTAGE!
- Attach the glass shade(C) to the pipe thread of the lamp body(B), lock it securely with the finial(D).

Your installation is now complete. Return power to the junction box and test the fixture.



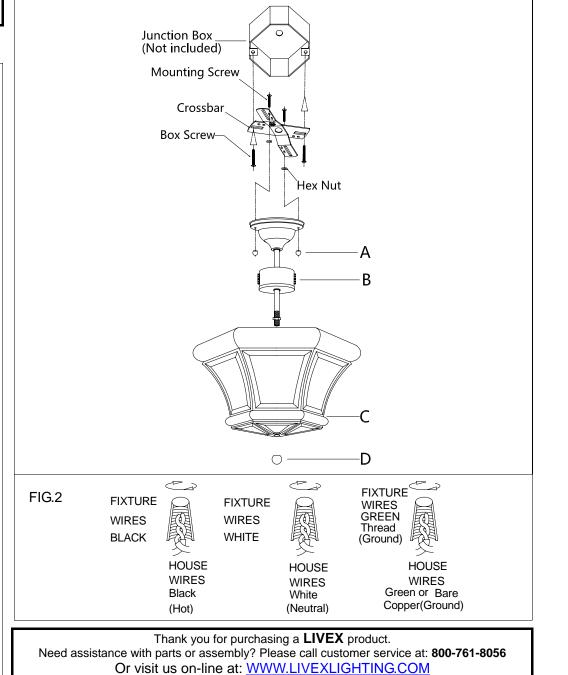

©COPYRIGHT ALL RIGHTS RESERVED. LIVEX LIGHTING, INC.